Genuine KIMRAY INC. Quality Since 1948

HIGH PRESSURE MOTOR VALVE

PISTON BALANCED BOTTOM WORKS STEEL

6" FMT PB-6" IV BOTTOM WORKS
1500 lbs. W.P. 300, 600 RF
METAL TEMP. -20°F to 750°F
SEAL TEMP. -20°F to 450°F

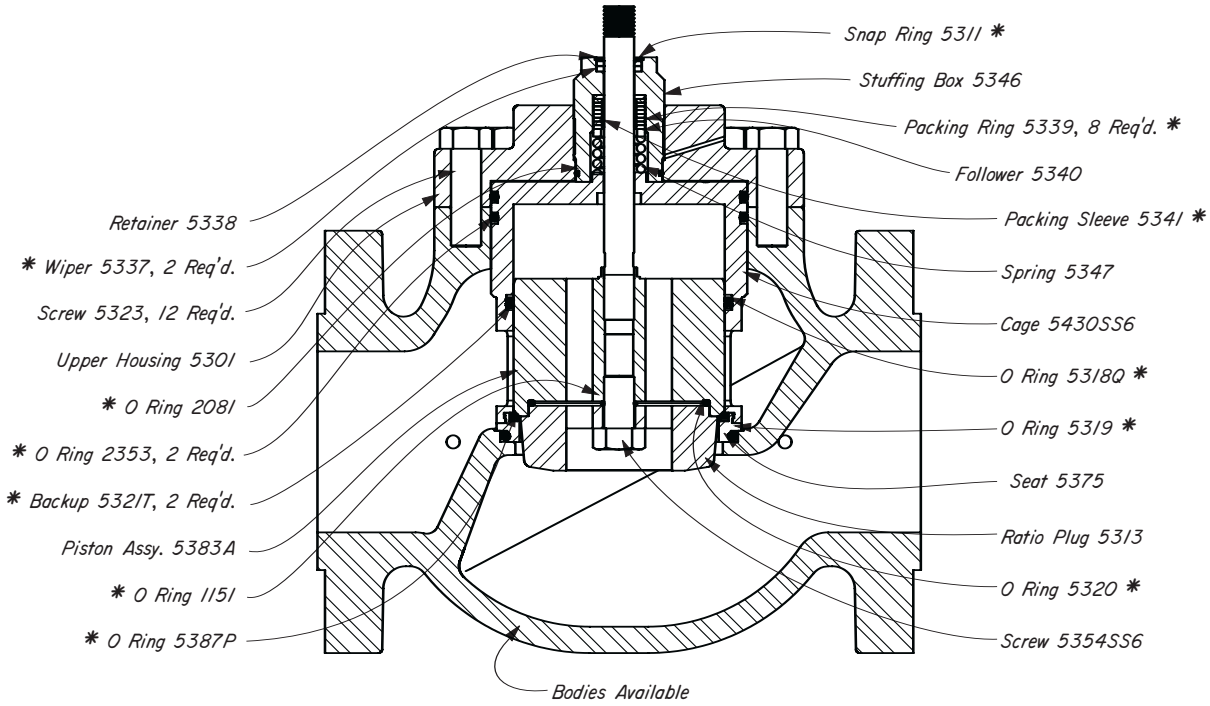

BODY	FLANGED	
	BODY	CLASS
THRU	5302	300 RF
	5322	600 RF

THRU VALVES AVAILABLE:

CAT. NO.	SIZE TYPE	REG. NO	OPER. PRES.	MAX W.P.	KIT
EIA-BW	6" FLGD.	6150 FMT PB 300RF 6 IV	1500	300 RF[a]	RWD-BW
EIB-BW	6" FLGD.	6150 FMT PB 600RF 6 IV	1500	600 RF[b]	RWD-BW

[a]For working pressure vs. working temperature of these flanges see ANSI B16.5.
[b]For working pressure vs. working temperature of these flanges see ANSI B16.5.

NOTES:

NOTE: All standard HPMV's have a Cat. No. Seats, stems, cages, stuffing boxes and valve bodies are available in 316 stainless steel. Inner valves can be made from a wide selection of materials. Specify when ordering.

Dimensions refer to E1:100.3

*These are recommended spare parts and are stocked as repair kits.